


FEATURES

The three layer,two terminal, axial lead, hermetically sealed diacs are designed specifically for triggering thyristors. They demonstrate low breakover current at breakover voltage as they withstand peak pulse current,The breakover symmetry is within three volts(DB3,DC34,DB4)or four volts(DB6).These diacs are intended for use in thyristors phase control, circuits for lamp dimming,universal motor speed control, and heat control.

JF's DB3/DC34/DB4/DB6 are bi-directional trigged diode designed to operate in conjunction with Triacs and SCR's

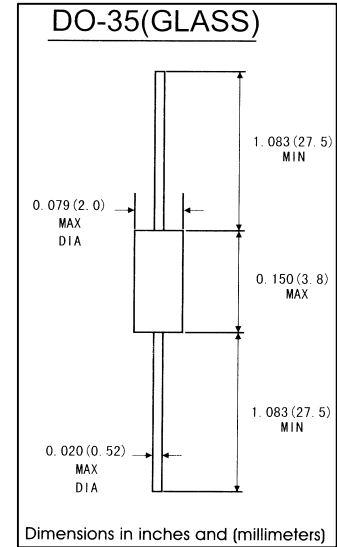

ABSOLUTE RATINGS(LIMITING VALUES)

Symbols	Parameters		Value				Units
			DB3	DC34	DB4	DB6	
P _c	Power Dissipation on Printed Circuit(L=10mm)	T _A =50°C	150				mW
I _{TRM}	Repetitive Peak in-state Current	tp=10u s F=100Hz	2.0	2.0	2.0	1.6	A
T _{STG} /T _J	Storage and Operating Junction Temperature		-40 to +125/-40 to 110				°C

ELECTRCAL CHARACTERISTICS

Symbols	Parameters	Test Conditions		Value				Units
				DB3	DC34	DB4	DB6	
VBO	Breakover Voltage(Note 2)	c=22nF(Note 2)	Min	28	30	35	56	V
		See diagram1	Typ	32	34	40	60	
		Max	36	38	45	70		
+VBO -VBO	Breakover Voltage Symmetry	c=22nF(Note 2) See diagram1	Max	± 3			± 4	V
± Δ V	Dynamic Breakover Voltage(Note 1)	Δ I=(Ibo to IF=10mA) See diagram1	Min	5			10	V
Vo	Output Voltage(Note 1)	See diagram2	Min	5				V
IBO	Breakover Current(Note 1)	c=22nF(Note 2)	Max	100				μ A
tr	Rise Time(Note 1)	See Diagram 3	Typ	1.5				μ S
IB	Leakage Current(Note 1)	VB=0.5 VBO max see diagram 1	Max	10				μ A

Notes: 1. Electrical characteristics applicable in both forward and reverse directions.

2. Connected in parallel with the devices.

RATINGS AND CHARACTERISTIC CURVES DB3/DC34/DB4/DB6

DIAGRAM 1: Current-voltage characteristics

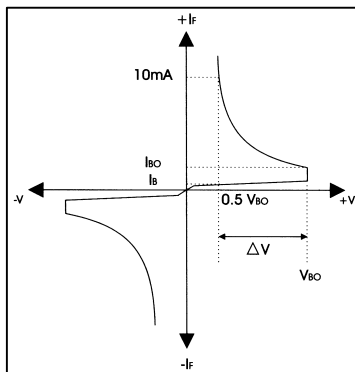


FIG.1-Power dissipation versus ambient temperature(maximum values)

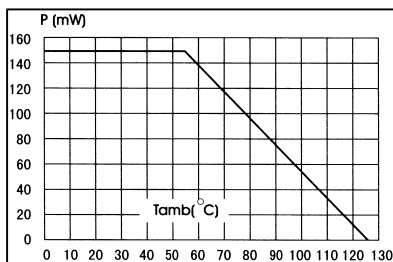


FIG.3-Peak pulse current versus pulse duration (maximum values)

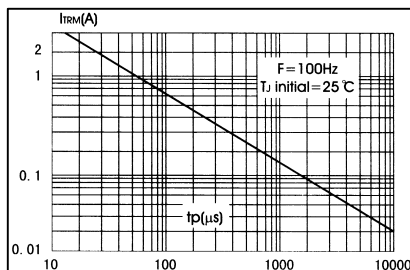


DIAGRAM 2: Test circuit for output voltage

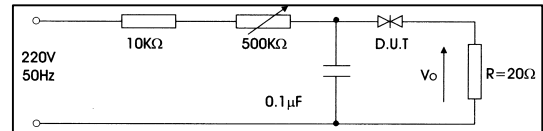


DIAGRAM 3: Test circuit see diagram2 adjust R for I_p=0.5A


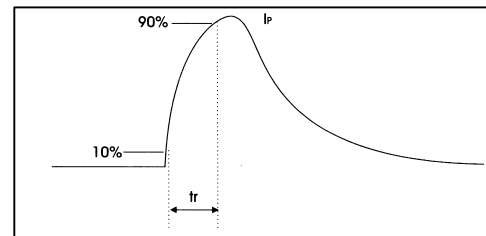


FIG.2-Relative variation of V_BO versus junction temperature(typical values)

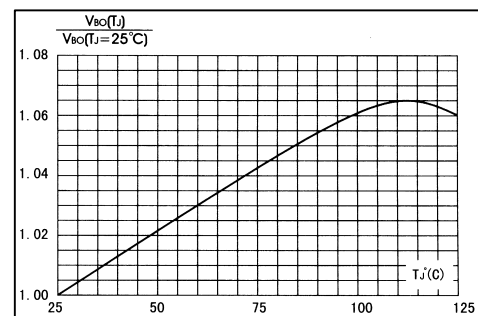

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.