

Optocouplers and Solid State Relays

April 2002



- Schematics and Specifications
- Package Specifications
- PCB Layouts
- Carrier Tape Specifications
- Safety Agency Certifications
- Glossary of Terms

www.fairchildsemi.com/products/opto

Across the board. Around the world.™

FAIRCHILD
SEMICONDUCTOR®

Table of Contents

Fairchild Semiconductor is a leader in the design and production of optocouplers and our newly released Solid State Relays (SSRs). Optocouplers incorporate two electronic components in a single device — an input infrared (IR) light emitting diode (LED) and an output photodetector. Solid State Relays, on the other hand, consist of an infrared LED optically coupled to a photovoltaic generator which drives a power MOSFET detector.

Two characteristics are critical to optocoupler performance — Voltage Isolation and Current Transfer Ratio. Voltage isolation (V_{ISO}), between the IR LED and the photodetector, is controlled by materials in the light path and by the physical separation between the two components. Current transfer ratio (CTR), is defined as the ratio of detector current to emitter current. Fairchild Semiconductor's product offering allows customers the broadest choice of Voltage Isolation and CTR options.

For the latest information and datasheets on our optocoupler and SSR families, please visit our website at:
www.fairchildsemi.com/products/opto.

Optocoupler Type (Detector; IR LED)	Index of Package Types and Safety Agency Certifications	Schematics and Specifications
Phototransistor Output; DC Sensing Input	1	9
Hermetic Phototransistor Output; DC Sensing Input	2	9
Phototransistor Output; Low Current DC Sensing Input	4	13
Phototransistor Output; AC Sensing Input	4	14
High Voltage Phototransistor Output; DC Sensing Input	4	14
Photodarlington Output; DC Sensing Input	5	15
High Voltage Photodarlington Output (with integral base-emitter resistor); DC Sensing Input	5	16
High-Gain Split Photodarlington Output; Low Current DC Sensing Input	5	17
1 Mbit/s High-Speed Transistor Output; DC Sensing Input	6	17
10 Mbit/s High-Speed Logic Gate Output; DC Threshold Sensing Input	6	18
10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®) Output; DC Sensing Input	6	18
Logic Output; AC Threshold Sensing Input	6	19
AC/DC to Logic Interface; AC Threshold Sensing Input	6	19
Random Phase Triac Driver Output; DC Threshold Sensing Input	7	20
Zero Crossing Triac Driver Output; DC Threshold Sensing Input	7	20
Photo SCR Output; DC Threshold Sensing Input	7	21
Bilateral Analog FET Output; DC Sensing Input	8	21
Schmitt Trigger Output; DC Threshold Sensing Input	8	21
Optically Isolated Error Amplifier; DC Sensing Input with Voltage Reference	8	22
Optically Coupled Solid State Relay; DC Threshold Sensing Input	8	22
Design Parameters and Definitions		
Package Specifications		23
PCB Layouts		29
Carrier Tape Specifications		31
Safety Agency Certification/Reference Numbers		35
Glossary of Terms		37

Phototransistor Output DC Sensing Input

Phototransistor Output DC Sensing Input	Package Type and Color (see pages 23 to 28)																Safety Agency Certifications (see pages 35 and 36)								Schematic and Specifications Page Number
	TO-18 Style Hermetic	4-Pin Plastic Housing	White Packages				Black Packages								BABT	BSI	CSA	DENKO	FIMKO	NEMKO	SEMKO	UL	VDE		
			4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line										8-Pin Surface Mount Dual In-line	
4N25																							10		
4N25-M																							10		
4N26																							10		
4N26-M																							10		
4N27																							10		
4N27-M																							10		
4N28																							10		
4N28-M																							10		
4N35																							10		
4N35-M																							10		
4N36																							10		
4N36-M																							10		
4N37																							10		
4N37-M																							10		
CNX35U																							10		
CNX36U																							10		
CNX38U																							10		
CNX39U																							10		
CNX82A.W (No Base Connection)																							12		
CNX83A.W																							10		
CNY17-1																							10		
CNY17-1-M																							10		
CNY17-2																							10		
CNY17-2-M																							10		
CNY17-3																							10		
CNY17-3-M																							10		
CNY17-4																							10		
CNY17F-1 (No Base Connection)																							12		
CNY17F-2 (No Base Connection)																							12		
CNY17F-3 (No Base Connection)																							12		
CNY17F-4 (No Base Connection)																							12		
H11A1																							10		
H11A1-M																							10		
H11A2																							10		
H11A2-M																							10		
H11A3																							10		
H11A3-M																							10		
H11A4																							10		
H11A4-M																							10		

Phototransistor Output DC Sensing Input

Phototransistor Output DC Sensing Input	Package Type and Color (see pages 23 to 28)																Safety Agency Certifications (see pages 35 and 36)								Schematic and Specifications Page Number	
	TO-18 Style Hermetic	White Packages						Black Packages						BABT	BSI	CSA	DEMCO	FIMKO	NEMKO	SEMKO	UL	VDE				
		4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line										6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line		8-Pin Through Hole Dual In-line
H11A5																										10
H11A5-M																										10
H11A817																										9
H11A817A																										9
H11A817B																										9
H11A817C																										9
H11A817D																										9
H11AV1-M																										11
H11AV1A-M																										11
H11AV2-M																										11
H11AV2A-M																										11
H24A1																										9
H24A2																										9
HMA121																										9
HMA124																										9
HMA2701																										9
HMHA2801																										9
HMHA281																										9
MCT2																										11
MCT2-M																										11
MCT210																										11
MCT2200																										11
MCT2201																										11
MCT2202																										11
MCT271																										11
MCT2E																										11
MCT2E-M																										11
MCT4																										9
MCT4R																										9
MCT6 (Dual Channel)																										13
MCT61 (Dual Channel)																										13
MCT62 (Dual Channel)																										13
MCT9001 (Dual Channel)																										13

Phototransistor Output DC Sensing Input

Phototransistor Output DC Sensing Input	Package Type and Color (see pages 23 to 28)														Safety Agency Certifications (see pages 35 and 36)							Schematic and Specifications Page Number	
	TO-18 Style Hermetic	4-Pin Plastic Housing	White Packages			Black Packages							BABT	BSI	CSA	DEMKO	FIMKO	NEMKO	SEMKO	UL	VDE		
	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line								
MOC205-M						■										■					■	■	12
MOC206-M						■										■					■	■	12
MOC207-M						■										■					■	■	12
MOC208-M						■										■					■	■	12
MOC211-M						■										■					■	■	12
MOC212-M						■										■					■	■	12
MOC213-M						■										■					■	■	12
MOC215-M						■										■					■	■	12
MOC216-M						■										■					■	■	12
MOC217-M						■										■					■	■	12
MOC8100-M			■	■	■											■	■	■	■	■	■	■	11
MOC8101 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8102 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8103 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8104 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8105 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8106 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8107 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8108 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8111 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8112 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOC8113 (No Base Connection)										■	■	■				■	■	■	■	■	■	■	12
MOCD207-M (Dual Channel)						■										■					■	■	13
MOCD208-M (Dual Channel)						■										■					■	■	13
MOCD211-M (Dual Channel)						■										■					■	■	13
MOCD213-M (Dual Channel)						■										■					■	■	13
MOCD217-M (Dual Channel)						■										■					■	■	13
SL5500										■	■	■				■	■	■	■	■	■	■	11
SL5501										■	■	■				■	■	■	■	■	■	■	11
SL5504										■	■	■				■	■	■	■	■	■	■	11
SL5511										■	■	■				■	■	■	■	■	■	■	11
SL5582.W (No Base Connection)												■				■	■	■	■	■	■	■	12
SL5583.W												■				■	■	■	■	■	■	■	11
TIL111										■	■	■				■	■	■	■	■	■	■	11
TIL111-M			■	■	■											■		■	■	■	■	■	11
TIL117-M			■	■	■											■		■	■	■	■	■	11

	Package Type and Color (see pages 23 to 28)												Safety Agency Certifications (see pages 35 and 36)								Schematic and Specifications Page Number							
	White Packages						Black Packages																					
	TO-18 Style Hermetic	4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line											
Phototransistor Output																												
Low Current DC Sensing Input																												
H11AG1												■	■	■					■	■	■	■	■	■	■	■	■	13
H11AG2												■	■	■					■	■	■	■	■	■	■	■	■	13
H11AG3												■	■	■					■	■	■	■	■	■	■	■	■	13
MCT5200												■	■	■					■	■	■	■	■	■	■	■	■	13
MCT5201												■	■	■					■	■	■	■	■	■	■	■	■	13
MCT5210												■	■	■					■	■	■	■	■	■	■	■	■	13
MCT5211												■	■	■					■	■	■	■	■	■	■	■	■	13
Phototransistor Output																												
AC Sensing Input																												
H11AA1												■	■	■					■	■	■	■	■	■	■	■	■	14
H11AA2												■	■	■					■	■	■	■	■	■	■	■	■	14
H11AA3												■	■	■					■	■	■	■	■	■	■	■	■	14
H11AA4												■	■	■					■	■	■	■	■	■	■	■	■	14
H11AA814									■	■	■								■	■	■	■	■	■	■	■	■	14
H11AA814A									■	■	■								■	■	■	■	■	■	■	■	■	14
HMAA2705				■															■	■					■	■	■	14
HMHAA280			■																■	■					■	■	■	14
MOC256-M								■												■					■	■	■	14
High Voltage Phototransistor Output																												
DC Sensing Input																												
4N38												■	■	■					■	■	■	■	■	■	■	■	■	14
H11D1												■	■	■					■	■	■	■	■	■	■	■	■	14
H11D2												■	■	■					■	■	■	■	■	■	■	■	■	14
H11D3												■	■	■					■	■	■	■	■	■	■	■	■	14
H11D4												■	■	■					■	■	■	■	■	■	■	■	■	14
MOC8204												■	■	■					■	■	■	■	■	■	■	■	■	14

Photodarlington Output

DC Sensing Input

	Package Type and Color (see pages 23 to 28)										Safety Agency Certifications (see pages 35 and 36)																
	White Packages					Black Packages																					
	TO-18 Style Hermetic	4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line	BABT	BSI	CSA	DEMKO	FIMKO	NEMKO	SEMKO	UL	VDE	
4N29												■	■	■				■	■	■	■	■	■	■	■	■	15
4N30												■	■	■				■	■	■	■	■	■	■	■	■	15
4N31												■	■	■				■	■	■	■	■	■	■	■	■	15
4N32												■	■	■				■	■	■	■	■	■	■	■	■	15
4N33												■	■	■				■	■	■	■	■	■	■	■	■	15
CNX48U												■	■	■				■	■	■	■	■	■	■	■	■	15
H11B1												■	■	■				■	■	■	■	■	■	■	■	■	15
H11B2												■	■	■				■	■	■	■	■	■	■	■	■	15
H11B255												■	■	■				■	■	■	■	■	■	■	■	■	15
H11B3												■	■	■				■	■	■	■	■	■	■	■	■	15
H11B815								■	■	■								■	■	■	■	■	■	■	■	■	15
H24B1		■																									15
H24B2		■																									15
MOC119 (No Base Connection)												■	■	■				■	■	■	■	■	■	■	■	■	16
MOC223-M							■											■							■	■	16
MOC8020 (No Base Connection)												■	■	■				■	■	■	■	■	■	■	■	■	16
MOC8021 (No Base Connection)												■	■	■				■	■	■	■	■	■	■	■	■	16
MOC8030 (No Base Connection)												■	■	■				■	■	■	■	■	■	■	■	■	16
MOC8050 (No Base Connection)												■	■	■				■	■	■	■	■	■	■	■	■	16
MOC8080												■	■	■				■	■	■	■	■	■	■	■	■	15
MOCD223-M (Dual Channel)							■											■							■	■	16
TIL113												■	■	■				■	■	■	■	■	■	■	■	■	15

High Voltage Photodarlington Output

(with integral base-emitter resistor)

DC Sensing Input

H11G1												■	■	■				■	■	■	■	■	■	■	■	■	16
H11G2												■	■	■				■	■	■	■	■	■	■	■	■	16
H11G3												■	■	■				■	■	■	■	■	■	■	■	■	16

High-Gain Split Photodarlington Output

Low Current DC Sensing Input

6N138															■	■	■		■						■	■	17
6N139															■	■	■		■						■	■	17
HCPL-0700							■											■	■						■	■	17
HCPL-0701							■											■	■						■	■	17
HCPL-2730 (Dual Channel)															■	■	■		■						■	■	17
HCPL-2731 (Dual Channel)															■	■	■		■						■	■	17

	Package Type and Color (see pages 23 to 28)																Safety Agency Certifications (see pages 35 and 36)								Schematic and Specifications Page Number		
	TO-18 Style Hermetic	4-Pin Plastic Housing	White Packages				Black Packages								BABT	BSI	CSA	DEMKO	FIMKO	NEMKO	SEMKO	UL	VDE				
			4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line										
1 Mbit/s High-Speed Transistor Output																											
DC Sensing Input																											
<hr/>																											
6N135																											
6N136																											
HCPL-0452 (No Base Connection)																											
HCPL-0500																											
HCPL-0501																											
HCPL-2503																											
HCPL-2530 (Dual Channel)																											
HCPL-2531 (Dual Channel)																											
HCPL-4502 (No Base Connection)																											
10 Mbit/s High-Speed Logic Gate Output																											
DC Threshold Sensing Input																											
<hr/>																											
6N137																											
HCPL-0600																											
HCPL-0601																											
HCPL-2601																											
HCPL-2611																											
HCPL-2630 (Dual Channel)																											
HCPL-2631 (Dual Channel)																											
10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®) Output																											
DC Sensing Input																											
<hr/>																											
74OL6000																											
74OL6001																											
74OL6010																											
74OL6011																											
Logic Output																											
AC Threshold Sensing Input																											
<hr/>																											
MID400																											
AC/DC to Logic Interface																											
AC Threshold Sensing Input																											
<hr/>																											
HCPL-3700																											

Random Phase Triac Driver Output

DC Threshold Sensing Input

MOC3010-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3011-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3012-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3020-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3021-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3022-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3023-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3051-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3052-M					■	■	■											■	■	■	■	■	■	■	■	■	20

Zero Crossing Triac Driver Output

DC Threshold Sensing Input

	TO-18 Style Hermetic	4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line	BABT	BSI	CSA	DEMKO	FIMKO	NEMKO	SEMKO	UL	VDE	
MOC3031-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3032-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3033-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3041-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3042-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3043-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3061-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3062-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3063-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3081-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3082-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3083-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3162-M					■	■	■											■	■	■	■	■	■	■	■	■	20
MOC3163-M					■	■	■											■	■	■	■	■	■	■	■	■	20

Photo SCR Output


DC Threshold Sensing Input

	TO-18 Style Hermetic	4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line	BABT	BSI	CSA	DEMKO	FIMKO	NEMKO	SEMKO	UL	VDE	
4N39												■	■	■				■	■	■	■	■	■	■	■	■	21
4N40												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C1												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C2												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C3												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C4												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C5												■	■	■				■	■	■	■	■	■	■	■	■	21
H11C6												■	■	■				■	■	■	■	■	■	■	■	■	21

	Package Type and Color (see pages 23 to 28)																Safety Agency Certifications (see pages 35 and 36)								Schematic and Specifications Page Number			
	White Packages								Black Packages																			
	TO-18 Style Hermetic	4-Pin Plastic Housing	4-Pin Half-Pitch Mini Flat	4-Pin Full-Pitch Mini Flat	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Small Outline	4-Pin Surface Mount Dual In-line	4-Pin Through Hole Dual In-line	4-Pin 0.4 Inch Dual In-line	6-Pin Surface Mount Dual In-line	6-Pin Through Hole Dual In-line	6-Pin 0.4 Inch Dual In-line	8-Pin Surface Mount Dual In-line	8-Pin Through Hole Dual In-line	8-Pin 0.4 Inch Dual In-line	BABT	BSI	CSA	DEMCO	FIMKO	NEMKO	SEMKO	UL	VDE		
Bilateral Analog FET Output DC Sensing Input																												
H11F1												■	■	■				■	■	■	■	■	■	■	■	■	■	21
H11F2												■	■	■				■	■	■	■	■	■	■	■	■	■	21
H11F3												■	■	■				■	■	■	■	■	■	■	■	■	■	21
Schmitt Trigger Output DC Threshold Sensing Input																												
H11L1-M					■	■	■											■		■	■	■	■	■	■	■	■	21
H11L2-M					■	■	■											■		■	■	■	■	■	■	■	■	21
H11L3-M					■	■	■											■		■	■	■	■	■	■	■	■	21
Schmitt Trigger Output DC Threshold Sensing Input																												
H11N1-M					■	■	■											■		■	■	■	■	■	■	■	■	22
H11N2-M					■	■	■											■		■	■	■	■	■	■	■	■	22
H11N3-M					■	■	■											■		■	■	■	■	■	■	■	■	22
Optically Isolated Error Amplifier DC Sensing Input with Voltage Reference																												
FOD2712							■												■	■						■	■	22
Optically Coupled Solid State Relay DC Threshold Sensing Input																												
HSR312					■	■												■		■						■		22
HSR312L					■	■												■		■						■		22
HSR412					■	■												■		■						■		22
HSR412L					■	■												■		■						■		22

Schematics and Specifications

4-Pin Package



Phototransistor Output; DC Sensing Input


Part Number	CTR @ ≤10 mA I _F (%)		BV _{CEO} (V)	BV _{CBO} (V)	BV _{ECO} (V)	t _R /t _F (μs)	V _{ISO} AC _{RMS} (kV)
	min	max	min	min	min	typ	1 minute
H11A817	50	600	35	NA	6	2.4/2.4	5.3
H11A817A	80	160	35	NA	6	2.4/2.4	5.3
H11A817B	130	260	35	NA	6	2.4/2.4	5.3
H11A817C	200	400	35	NA	6	2.4/2.4	5.3
H11A817D	300	600	35	NA	6	2.4/2.4	5.3
HMA121	50	600	80	NA	7	3/3	3.75
HMA124	100	1200	80	NA	7	3/3	3.75
HMA2701	50	300	40	NA	7	3/3	3.75
HMHA2801	80	600	80	NA	7	3/3	2.5
HMHA281	50	600	80	NA	7	3/3	2.5

Hermetic Phototransistor Output; DC Sensing Input

Part Number	CTR @ 10 mA I _F (%)		BV _{CEO} (V)	BV _{CBO} (V)	BV _{ECO} (V)	V _{CE} (SAT) (V)	V _{ISO} DC (kV)
	min	max	min	min	min	max	1 second
MCT4	15	—	30	NA	7	0.5	1
MCT4R*	15	—	30	NA	7	0.5	1

*Screened to MIL-STD -883C Class B

4-Pin Package




Phototransistor Output; DC Sensing Input

Part Number	CTR @ ≤10 mA I _F (%)		BV _{CEO} (V)	BV _{CBO} (V)	BV _{ECO} (V)	t _{ON} /t _{OFF} (μs)	V _{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
H24A1	100	—	30	NA	7	—	5.3
H24A2	20	—	30	NA	7	—	5.3

Schematics and Specifications

6-Pin Package




Phototransistor Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV) 1 minute
	min	max	min	min	min	max	
4N25	20	—	30	70	7	—	5.3
4N25-M							4.2
4N26	20	—	30	70	7	—	5.3
4N26-M							4.2
4N27	10	—	30	70	7	—	5.3
4N27-M							4.2
4N28	10	—	30	70	7	—	5.3
4N28-M							4.2
4N35	100	—	30	70	7	10/10	5.3
4N35-M							4.2
4N36	100	—	30	70	7	10/10	5.3
4N36-M							4.2
4N37	100	—	30	70	7	10/10	5.3
4N37-M							4.2
CNX35U	40	160	30	70	7	20/20	5.3
CNX36U	80	200	30	70	7	20/20	5.3
CNX38U	70	210	80	120	7	20/20	5.3
CNX39U	60	100	30	70	7	20/20	5.3
CNX83A.W	40	250	50	70	7	—	5.3
CNY17-1	40	80	70	70	7	10/10	5.3
CNY17-1-M							4.2
CNY17-2	63	125	70	70	7	10/10	5.3
CNY17-2-M							4.2
CNY17-3	100	200	70	70	7	10/10	5.3
CNY17-3-M							4.2
CNY17-4	160	320	70	70	7	10/10	5.3
H11A1	50	—	30	70	7	—	5.3
H11A1-M							4.2
H11A2	20	—	30	70	7	—	5.3
H11A2-M							4.2
H11A3	20	—	30	70	7	—	5.3
H11A3-M							4.2
H11A4	10	—	30	70	7	—	5.3
H11A4-M							4.2
H11A5	30	—	30	70	7	—	5.3
H11A5-M							4.2

Schematics and Specifications

6-Pin Package



Phototransistor Output; DC Sensing Input (cont.)

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV) 1 minute
	min	max	min	min	min	max	
H11AV1-M	100	300	70	70	7	15/15	4.2
H11AV1A-M	100	300	70	70	7	15/15	4.2
H11AV2-M	50	—	70	70	7	15/15	4.2
H11AV2A-M	50	—	70	70	7	15/15	4.2
MCT2	20	—	30	70	7	—	5.3
MCT2-M							4.2
MCT210	150	—	30	30	6	—	5.3
MCT2200	20	—	30	70	7	10/10	5.3
MCT2201	100	—	30	70	7	10/10	5.3
MCT2202	63	125	30	70	7	10/10	5.3
MCT271	45	90	30	70	7	7/7	5.3
MCT2E	20	—	30	70	7	—	5.3
MCT2E-M							4.2
MOC8100-M	50*	—	30	70	NA	20/20	4.2
SL5500	50	300	30	30	7	20/50	5.3
SL5501	25	400	30	30	7	20/50	5.3
SL5504	25	400	80	120	7	50/150	5.3
SL5511	25**	—	30	30	7	20/50	5.3
SL5583.W	40	320	50	70	7	20/50	5.3
TIL111	12.5***	—	30	70	NA	10/10	5.3
TIL111-M							4.2
TIL117-M	50	—	30	70	NA	10/10	4.2


*CTR measured at $I_F = 1$ mA

**CTR measured at $I_F = 2$ mA

***CTR measured at $I_F = 16$ mA

Schematics and Specifications


6-Pin Package (No Base Connection)



Phototransistor Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
CNX82A.W	40	250	50	NA	7	—	5.3
CNY17F-1	40	80	70	NA	7	10/10	5.3
CNY17F-2	63	125	70	NA	7	10/10	5.3
CNY17F-3	100	200	70	NA	7	10/10	5.3
CNY17F-4	160	320	70	NA	7	10/10	5.3
MOC8101	50	80	30	NA	7	—	5.3
MOC8102	73	117	30	NA	7	—	5.3
MOC8103	108	173	30	NA	7	—	5.3
MOC8104	160	256	30	NA	7	—	5.3
MOC8105	65	133	30	NA	7	—	5.3
MOC8106	50	150	70	NA	7	—	5.3
MOC8107	100	300	70	NA	7	—	5.3
MOC8108	250	600	70	NA	7	—	5.3
MOC8111	20	—	30	NA	7	20/20	5.3
MOC8112	50	—	30	NA	7	20/20	5.3
MOC8113	100	—	30	NA	7	20/20	5.3
SL5582.W	40	320	50	NA	7	20/50	5.3

8-Pin Package




Phototransistor Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	$V_{CE(SAT)}$ (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV)
	min	max	min	max	min	max	1 minute
MOC205-M	40	80	70	0.4	7	—	2.5
MOC206-M	63	125	70	0.4	7	—	2.5
MOC207-M	100	200	70	0.4	7	—	2.5
MOC208-M	40	125	70	0.4	7	—	2.5
MOC211-M	20	—	30	0.4	7	—	2.5
MOC212-M	50	—	30	0.4	7	—	2.5
MOC213-M	100	—	30	0.4	7	—	2.5
MOC215-M	20*	—	30	0.4	7	—	2.5
MOC216-M	50*	—	30	0.4	7	—	2.5
MOC217-M	100*	—	30	0.4	7	—	2.5

*CTR measured at $I_F = 1$ mA

Schematics and Specifications

8-Pin Package (Dual Channel)




Phototransistor Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
MCT9001	50*	600*	55	NA	7	—	5.3
MOCD207-M	100	200	70	NA	7	—	2.5
MOCD208-M	40	125	70	NA	7	—	2.5
MOCD211-M	20	—	30	NA	7	—	2.5
MOCD213-M	100	—	70	NA	7	—	2.5
MOCD217-M	100**	—	30	NA	7	—	2.5

*CTR measured at $I_F = 5$ mA

**CTR measured at $I_F = 1$ mA

8-Pin Package (Dual Channel)




Phototransistor Output; DC Sensing Input

Part Number	CTR @ 5 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
MCT6	20*	—	30	NA	6	—	5.3
MCT61	50	—	30	NA	6	—	5.3
MCT62	100	—	30	NA	6	—	5.3

*CTR measured at $I_F = 10$ mA

6-Pin Package




Phototransistor Output; Low Current DC Sensing Input

Part Number	CTR @ ≤ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
H11AG1	300	—	30	70	7	—	5.3
H11AG2	200	—	30	70	7	—	5.3
H11AG3	100	—	30	70	7	—	5.3
MCT5200	75	—	30	30	NA	—	5.3
MCT5201	120	—	30	30	NA	—	5.3
MCT5210	70	—	30	30	NA	—	5.3
MCT5211	150	—	30	30	NA	—	5.3

Schematics and Specifications

4-Pin Package




Phototransistor Output; AC Sensing Input

Part Number	CTR @ $\pm 1 \text{ mA } I_F$ (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_R/t_F (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	typ	1 minute
H11AA814	20	300	35	NA	6	2.4/2.4	5.3
H11AA814A	50	150	35	NA	6	2.4/2.4	5.3
HMAA2705	50*	300*	40	NA	7	3/3	3.75
HMHAA280	50*	600*	80	NA	7	3/3	2.5

*CTR measured at $I_F = \pm 5 \text{ mA}$


6-Pin Package



Phototransistor Output; AC Sensing Input

Part Number	CTR @ $\leq 10 \text{ mA } I_F$ (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
H11AA1	20	—	30	70	7	—	5.3
H11AA2	10	—	30	70	7	—	5.3
H11AA3	50	—	30	70	7	—	5.3
H11AA4	100	—	30	70	7	—	5.3


8-Pin Package



Phototransistor Output; AC Sensing Input

Part Number	CTR @ $\pm 10 \text{ mA } I_F$ (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
MOC256-M	20	—	30	70	5	—	2.5

6-Pin Package




High Voltage Phototransistor Output; DC Sensing Input

Part Number	CTR @ $10 \text{ mA } I_F$ (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
4N38	20	—	80	80	7	—	5.3
H11D1	20	—	300*	300	7	—	5.3
H11D2	20	—	300*	300	7	—	5.3
H11D3	20	—	200*	200	7	—	5.3
H11D4	10	—	200*	200	7	—	5.3
MOC8204	20	—	400*	400	NA	—	5.3

* BV_{CEO} : $R_{BE} = 1 \text{ M}\Omega$

Schematics and Specifications


4-Pin Package



Photodarlington Output; DC Sensing Input

Part Number	CTR @ 1 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_R/t_F (μ s)	V_{ISO} AC _{RMS} (kV) 1 minute
	min	max	min	min	min	max	
H11B815	600	7500	35	NA	6	300/250	5.3


4-Pin Package



Photodarlington Output; DC Sensing Input

Part Number	CTR @ 5 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	$V_{CEO(SAT)}$ (μ s)	V_{ISO} AC _{RMS} (kV) 1 minute
	min	max	min	min	min	max	
H24B1	1000	—	30	NA	7	1.0	3.75
H24B2	400	—	30	NA	7	1.0	3.75

6-Pin Package




Photodarlington Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μ s)	V_{ISO} AC _{RMS} (kV) 1 minute
	min	max	min	min	min	max	
4N29	100	—	30	30	5	5/40	5.3
4N30	100	—	30	30	5	5/40	5.3
4N31	50	—	30	30	5	5/40	5.3
4N32	500	—	30	30	5	5/100	5.3
4N33	500	—	30	30	5	5/100	5.3
CNX48U	600	—	30	30	7	—	5.3
H11B1	500*	—	25	30	7	—	5.3
H11B2	200*	—	25	30	7	—	5.3
H11B255	100	—	55	55	7	—	5.3
H11B3	100*	—	25	30	7	—	5.3
MOC8080	500	—	55	55	7	—	5.3
TIL113	300	—	30	30	5	5/100	5.3

*CTR measured at $I_F = 1$ mA

Schematics and Specifications


6-Pin Package (No Base Connection)



Photodarlington Output; DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{ECO} (V)	$V_{CE(SAT)}$ (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	max	max	1 minute
MOC119	300	—	30	7	1	—	5.3
MOC8020	500	—	50	5	2	—	5.3
MOC8021	1000	—	50	5	2	—	5.3
MOC8030	300	—	80	5	—	—	5.3
MOC8050	500	—	80	5	—	—	5.3


8-Pin Package



Photodarlington Output; DC Sensing Input

Part Number	CTR @ 1 mA I_F (%)		BV_{CEO} (V)	$V_{CE(SAT)}$ (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	max	min	max	1 minute
MOC223-M	500	—	30	1	7	—	2.5


8-Pin Package (Dual Channel)



Photodarlington Output; DC Sensing Input

Part Number	CTR @ 1 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{ECO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
MOC223-M	500	—	30	NA	7	—	2.5

6 Pin Package




High Voltage Photodarlington Output (with integral base-emitter resistor); DC Sensing Input

Part Number	CTR @ 10 mA I_F (%)		BV_{CEO} (V)	BV_{CBO} (V)	BV_{EBO} (V)	t_{ON}/t_{OFF} (μs)	V_{ISO} AC _{RMS} (kV)
	min	max	min	min	min	max	1 minute
H11G1	1000	—	100	100	7	—	5.3
H11G2	1000	—	80	80	7	—	5.3
H11G3	200*	—	55	55	7	—	5.3

*CTR measured at $I_F = 1$ mA

Schematics and Specifications


8-Pin Package



High-Gain Split Photodarlington Output; Low Current DC Sensing Input

Part Number	CTR @ 1.6 mA I _F (%)		V _{OL} (V) max	I _{OH} (μA) max	t _{PHL} /t _{PLH} (μs) max	V _{ISO} AC _{RMS} (kV) 1 minute
	min	max				
6N138	300	—	0.4	250	10/35	2.5
6N139	500	—	0.4	100	25/60	2.5
HCPL-0700	300	2600	0.4	250	10/35	2.5
HCPL-0701	500	2600	0.4	100	25/60	2.5


8-Pin Package (Dual Channel)



High-Gain Split Darlington Output; Low Current DC Sensing Input

Part Number	CTR @ 1.6 mA I _F (%)		V _{OL} (V) max	I _{CLL} (mA) max	t _{PHL} /t _{PLH} (μs) max	V _{ISO} AC _{RMS} (kV) 1 minute
	min	max				
HCPL-2730	300	—	0.4	3	20/35	2.5
HCPL-2731	500	—	0.4	3	20/35	2.5

8-Pin Package




Pin 7 is not connected in Part Numbers HCPL-0452 and HCPL-4502

1 Mbit/s High-Speed Transistor Output; DC Sensing Input

Part Number	CTR @ 16 mA I _F (%)		V _{OL} (V) max	I _{CLL} (μA) max	t _{PHL} /t _{PLH} (μs) max	V _{ISO} AC _{RMS} (kV) 1 minute
	min	max				
6N135	7	50	0.4	200	1.5/1.5	2.5
6N136	19	50	0.4	200	0.8/0.8	2.5
HCPL-0452	19	50	0.4	200	0.8/0.8	2.5
HCPL-0500	7	50	0.4	200	1.5/1.5	2.5
HCPL-0501	19	50	0.4	200	0.8/0.8	2.5
HCPL-2503	12	—	0.4	200	0.8/0.8	2.5
HCPL-4502	19	50	0.4	200	0.8/0.8	2.5

8-Pin Package (Dual Channel)




1 Mbit/s High-Speed Transistor Output; DC Sensing Input

Part Number	CTR @ 16 mA I _F (%)		V _{OL} (V) max	I _{CLL} (μA) max	t _{PHL} /t _{PLH} (μs) max	V _{ISO} AC _{RMS} (kV) 1 minute
	min	max				
HCPL-2530	7	50	0.5	400	1.5/1.5	2.5
HCPL-2531	19	50	0.5	400	0.8/0.8	2.5

Schematics and Specifications


8-Pin Package



10 Mbit/s High-Speed Logic Gate Output; DC Threshold Sensing Input

Part Number	I_{FT} (mA) max	V_{OL} (V) max	I_{CCH} (μ S) max	I_{CCL} (mA) max	t_{PHL}/t_{PLH} (μ S) max	V_{ISO} AC_{RMS} (kV) 1 minute
6N137	5	0.6	10	13	0.075/0.075	2.5
HCPL-0600	5	0.6	10	13	0.075/0.075	2.5
HCPL-0601	5	0.6	10	13	0.075/0.075	2.5
HCPL-2601	5	0.6	10	13	0.075/0.075	2.5
HCPL-2611	5	0.6	10	13	0.075/0.075	2.5


8-Pin Package (Dual Channel)



10 Mbit/s High-Speed Logic Gate Output; DC Threshold Sensing Input

Part Number	I_{FT} (mA) max	V_{OL} (V) max	I_{CCH} (μ S) max	I_{CCL} (mA) max	t_{PHL}/t_{PLH} (μ S) max	V_{ISO} AC_{RMS} (kV) 1 minute
HCPL-2630	5	0.6	15	21	0.075/0.075	2.5
HCPL-2631	5	0.6	15	21	0.075/0.075	2.5


6-Pin Package



10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®); DC Sensing Input

Part Number	V_{IH} (mA) min	V_{IL} (V) max	V_{OL} (V) max	I_{OL} (mA) min	t_{PHL}/t_{PLH} (μ S) max	V_{ISO} AC_{RMS} (kV) 1 minute
74OL6000	2	0.8	0.6	16	0.1/0.1	5.3

6-Pin Package




10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®); DC Sensing Input

Part Number	V_{IH} (mA) min	V_{IL} (V) max	V_{OL} (V) max	I_{OL} (mA) min	t_{PHL}/t_{PLH} (μ S) max	V_{ISO} AC_{RMS} (kV) 1 minute
74OL6001	2	0.8	0.6	16	0.1/0.1	5.3

Schematics and Specifications

6-Pin Package




LSTTL to CMOS Buffer

10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®); DC Sensing Input

Part Number	V_{IH} (mA) min	V_{IL} (V) max	V_{OL} (V) max	I_{OL} (mA) min	t_{PHL}/t_{PLH} (μs) max	V_{ISO} AC _{RMS} (kV) 1 minute
74OL6010	2	0.8	0.6	16	0.12/0.18	5.3

6-Pin Package




LSTTL to CMOS Inverter

10 Mbit/s High-Speed Logic-to-Logic (OPTOLOGIC®); DC Sensing Input

Part Number	V_{IH} (mA) min	V_{IL} (V) max	V_{OL} (V) max	I_{OL} (mA) min	t_{PHL}/t_{PLH} (μs) max	V_{ISO} AC _{RMS} (kV) 1 minute
74OL6011	2	0.8	0.6	16	0.12/0.18	5.3


8-Pin Package



Logic Output; AC Threshold Sensing Input

Part Number	$I_{(ON)}$ RMS (mA) min	$I_{(OFF)}$ RMS (mA) max	V_{CC} (V) max	$V_{I(ON)}$ RMS (V) min	$V_{I(OFF)}$ RMS (V) max	I_{OH} (μA) max	V_{ISO} AC _{RMS} (kV) 1 minute
MID400	4	0.15	7	90	5.5	100	2.5

8-Pin Package




AC/DC to Logic Interface; AC Threshold Sensing Input

Part Number	I_{TH+} (mA) min	I_{TH+} (mA) max	I_{TH-} (mA) min	I_{TH-} (mA) max	V_{TH+} (DC) (mA) min	V_{TH+} (DC) (mA) max	V_{TH-} (DC) (V) min	V_{TH-} (DC) (V) max	V_{TH+} (AC) (V) min	V_{TH+} (AC) (V) max	V_{TH-} (AC) (V) min	V_{TH-} (AC) (V) max	V_{ISO} AC _{RMS} (kV) 1 minute
HCPL3700	1.96	3.11	1.00	1.62	3.35	4.05	2.01	2.86	4.23	5.50	2.87	4.20	2.5

Schematics and Specifications

6-Pin Package




* Do not connect

Random Phase Triac Driver Output; DC Threshold Sensing Input

Part Number	I_{FT} (mA) max	V_{TM} (V) max	V_{DRM} (V) min	I_H (μ A) typ	I_{DRM} (nA) max	V_{ISO} AC _{RMS} (kV) 1 minute
MOC3010-M	15	3	250	100	100	4.2
MOC3011-M	10	3	250	100	100	4.2
MOC3012-M	5	3	250	100	100	4.2
MOC3020-M	30	3	400	100	100	4.2
MOC3021-M	15	3	400	100	100	4.2
MOC3022-M	10	3	400	100	100	4.2
MOC3023-M	5	3	400	100	100	4.2
MOC3051-M	15	2.5	600	280	100	4.2
MOC3052-M	10	2.5	600	280	100	4.2

6-Pin Package



* Do not connect

Zero Crossing Triac Driver Output; DC Threshold Sensing Input

Part Number	I_{FT} (mA) max	V_{TM} (V) max	V_{DRM} (V) max	dv/dt (V/ μ s) min	I_{DRM1} (nA) max	V_{ISO} AC _{RMS} (kV) 1 minute
MOC3031-M	15	3	250	1000	100	4.2
MOC3032-M	10	3	250	1000	100	4.2
MOC3033-M	5	3	250	1000	100	4.2
MOC3041-M	15	3	400	1000	100	4.2
MOC3042-M	10	3	400	1000	100	4.2
MOC3043-M	5	3	400	1000	100	4.2
MOC3061-M	15	3	600	600	500	4.2
MOC3062-M	10	3	600	600	500	4.2
MOC3063-M	5	3	600	600	500	4.2
MOC3081-M	15	3	800	600	500	4.2
MOC3082-M	10	3	800	600	500	4.2
MOC3083-M	5	3	800	600	500	4.2
MOC3162-M	10	3	600	1000	100	4.2
MOC3163-M	5	3	600	1000	100	4.2

Schematics and Specifications

6-Pin Package





Photo SCR Output; DC Threshold Sensing Input

Part Number	I_{FT}^* (mA) max	V_{TM} (V) max	V_{DRM} (V) min	I_{DM} (μ A) max	I_H (mA) max	V_{ISO} AC _{RMS} (kV) 1 minute
4N39	14	1.3	200	50	1.0	5.3
4N40	14	1.3	400	150	1.0	5.3
H11C1	11	1.3	200	50	—	5.3
H11C2	11	1.3	200	50	—	5.3
H11C3	14	1.3	200	50	—	5.3
H11C4	11	1.3	400	150	—	5.3
H11C5	11	1.3	400	150	—	5.3
H11C6	14	1.3	400	150	—	5.3

* I_{FT} @ $V_{AK} = 100$ V

6-Pin Package




* Do not connect

Bilateral Analog FET Output; DC Sensing Input

Part Number	R_{DS} (Ω)		V_{BR} (V) min	I_{46} (nA) max	t_{ON}/t_{OFF} (μ s) max	V_{ISO} AC _{RMS} (kV) 1 minute
	ON max	OFF min				
H11F1	200	300M	30	50	25/25	5.3
H11F2	330	300M	30	50	25/25	5.3
H11F3	470	300M	15	50	25/25	5.3

6-Pin Package




Open collector/inverted output

Schmitt Trigger Output; DC Threshold Sensing Input

Part Number	$I_{FT(ON)}$ (mA) max	$I_{FT(OFF)}$ (mA) min	V_{CC} (V) max	V_{OL} (V) max	$I_{CC(ON)}$ (mA) max	V_{ISO} AC _{RMS} (kV) 1 minute
H11L1-M	1.6	0.3	15	0.4	5	4.2
H11L2-M	10.0	0.3	15	0.4	5	4.2
H11L3-M	5.0	0.3	15	0.4	5	4.2

Schematics and Specifications

6-Pin Package




Open collector/inverted output

Schmitt Trigger Output; DC Threshold Sensing Input

Part Number	$I_{FT(ON)}$ (mA) max	$I_{FT(OFF)}$ (mA) min	$I_{CC(ON)}$ (mA) max	V_{OL} (V) max	t_{PHL}/t_{PLH} (μs) max	V_{ISO} AC _{RMS} (kV) 1 minute
H11N1-M	3.2	0.3	10	0.5	.330/.330	4.2
H11N2-M	5.0	0.3	10	0.5	.330/.330	4.2
H11N3-M	10.0	0.3	10	0.5	.330/.330	4.2


8-Pin Package



Optically Isolated Error Amplifier; DC Sensing Input with Voltage Reference

Part Number	V_{REF} (V) min	V_{REF} (V) max	CTR @ 10 mA I_F (%)		BV_{CEO} (V) min	V_{ISO} AC _{RMS} (kV) 1 minute
FOD2712	1.221	1.259	100	200	70	2.5

6-Pin Package



*MOSFETs (pins 4, 5 and 6) connected in parallel


MOSFETs (pins 4 and 6) connected in series

Optically Coupled Solid State Relay; DC Threshold Sensing Input


Part Number	$I_F(ON)$ (mA) max	$I_F(OFF)$ (mA) min	V_{OPR} (V_{DC} or $V_{AC(PK)}$) max	I_L (mA) max	R_{ON} (Ω) max	I_{LMT} (mA)		V_{ISO} AC _{RMS} (kV) 1 minute
HSR312	2.0	0.4	250	190	10	NA	NA	4.0
				320*	3*	NA*	NA*	
HSR312L	2.0	0.4	250	170	15	190	300	4.0
				300*	4.25*	330*	560*	
HSR412	3.0	0.4	400	140	27	NA	NA	4.0
				210*	7*	NA*	NA*	
HSR412L	3.0	0.4	400	120	35	130	220	4.0
				200*	9*	260*	440*	

Package Specifications


4-Pin Through Hole Dual In-line Package (Black)

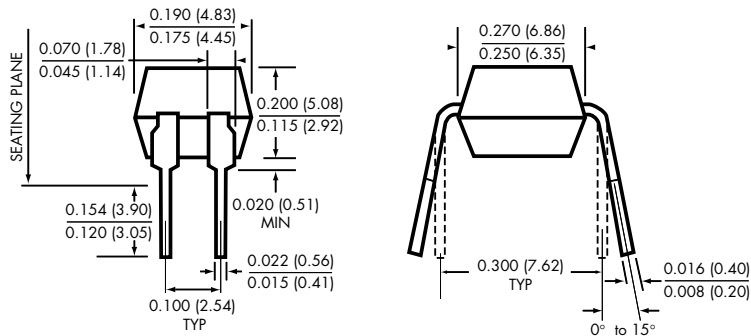

4-Pin Through Hole (0.4" Lead Spacing) Dual In-line Package (Black)

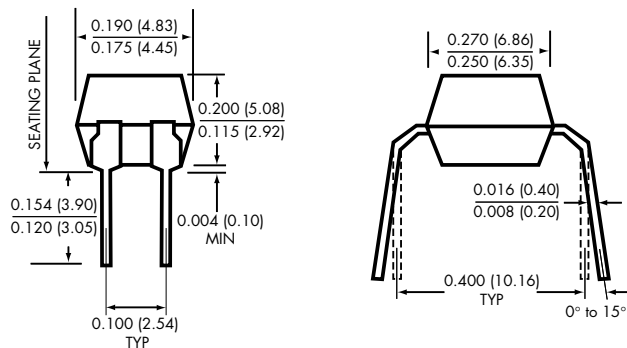


6-Pin Surface Mount Dual In-line Package (Black)

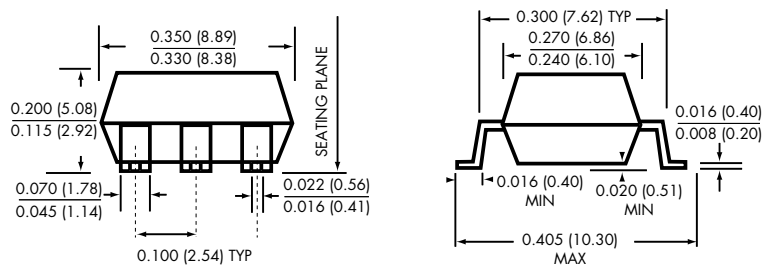


All dimensions are in inches (millimeters)

Package Specifications


6-Pin Through Hole Dual In-line Package (Black)

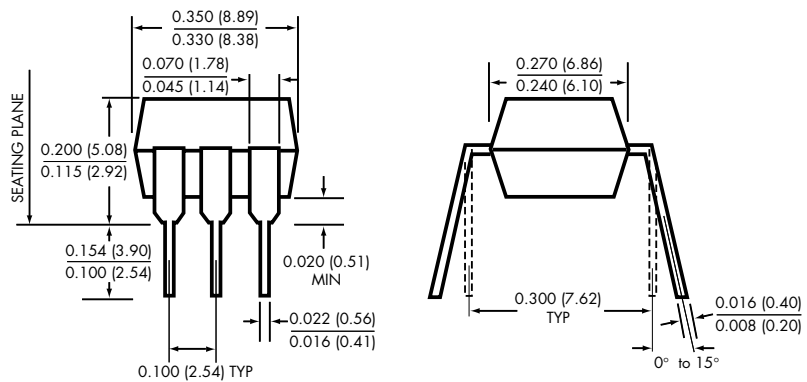

6-Pin Through Hole (0.4" Lead Spacing) Dual In-line Package (Black)

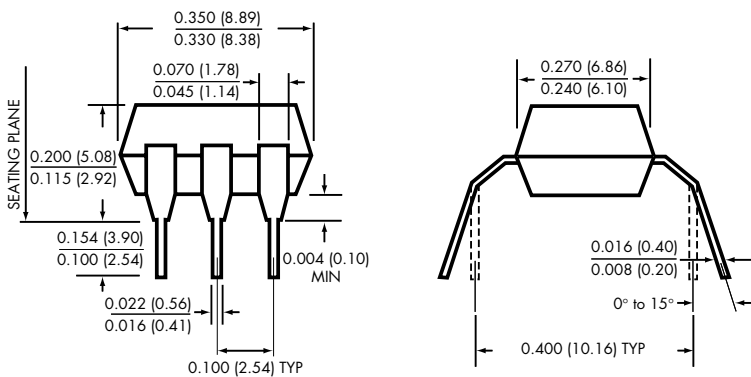


6-Pin Surface Mount Dual In-line Package (White)

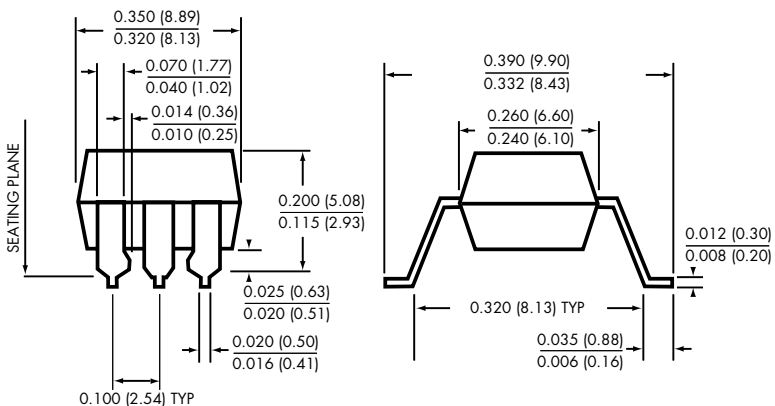


All dimensions are in inches (millimeters)

Package Specifications


6-Pin Through Hole Dual In-line Package (White)

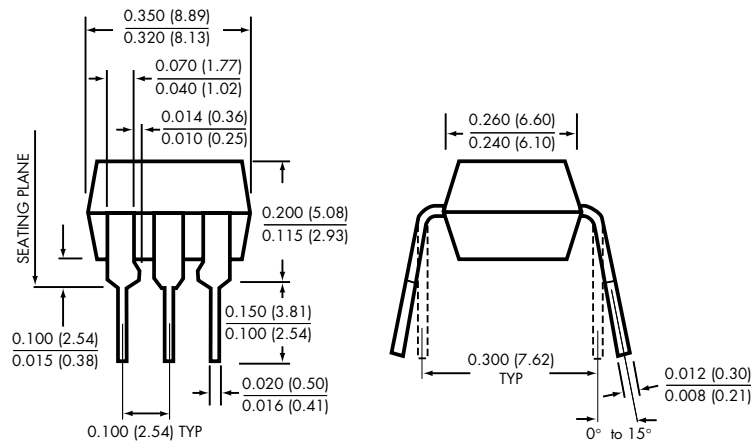

6-Pin Through Hole (0.4" Lead Spacing) Dual In-line Package (White)

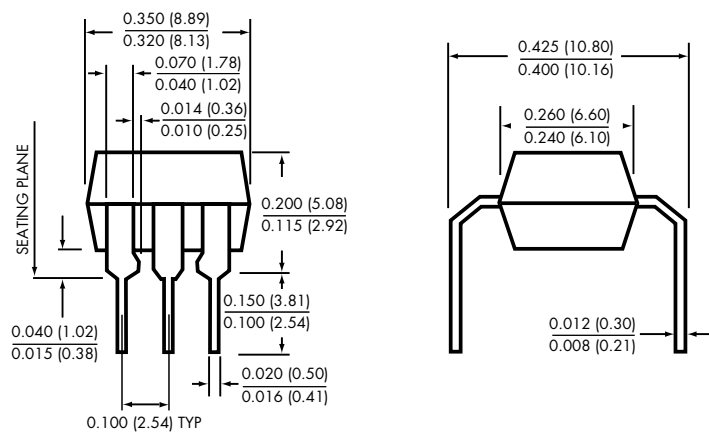


8-Pin Small Outline Package (White)

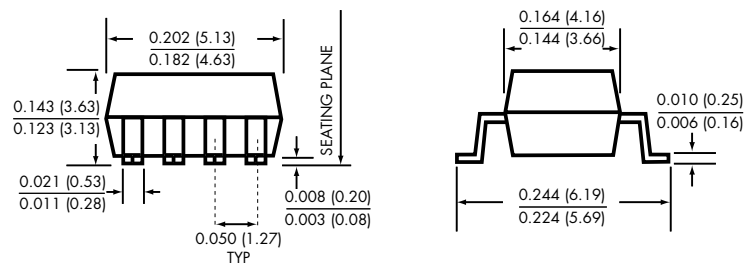



All dimensions are in inches (millimeters)

Package Specifications


8-Pin Surface Mount Dual In-line Package (Black)

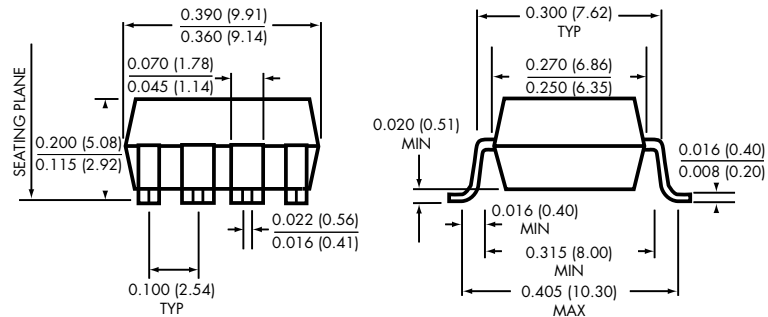

8-Pin Through Hole Dual In-line Package (Black)

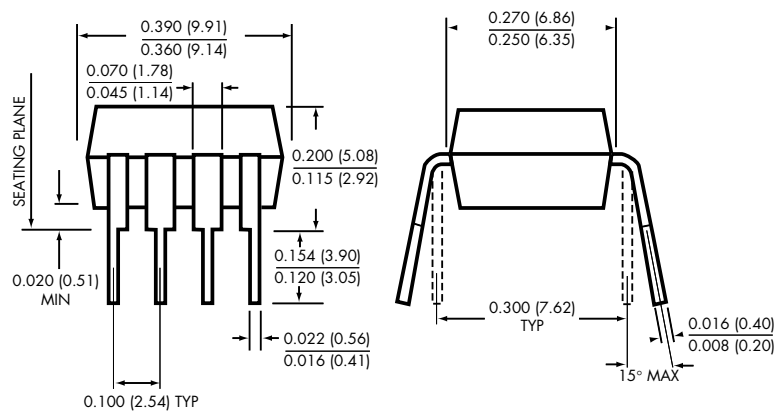



8-Pin Through Hole (0.4" Lead Spacing) Dual In-line Package (Black)

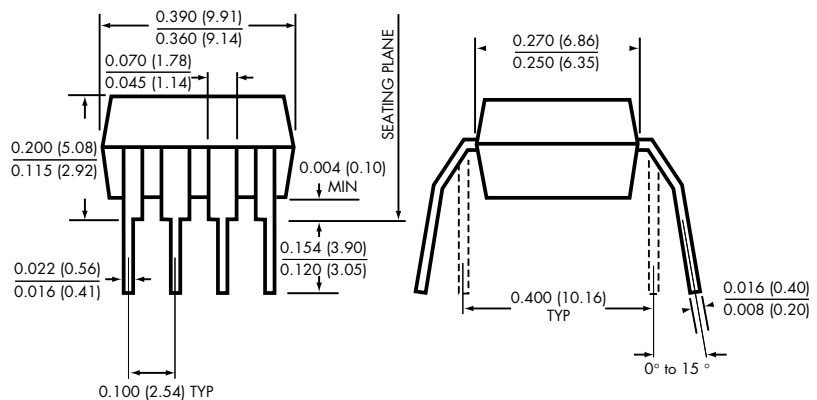


All dimensions are in inches (millimeters)

4-Pin Plastic Housing Package

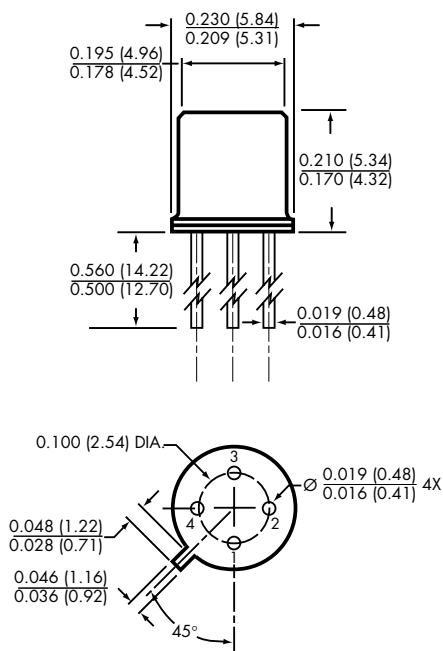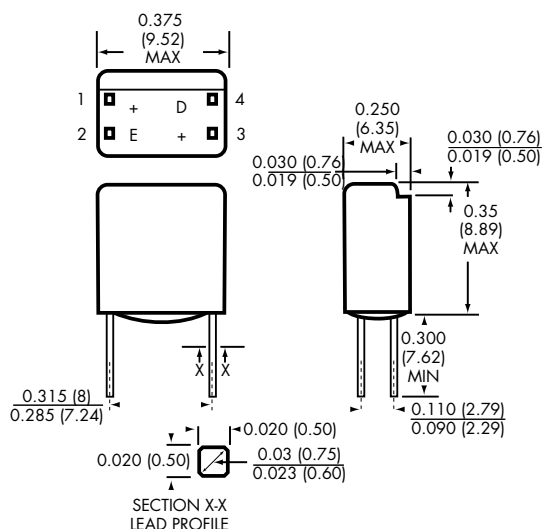


www.fairchildsemi.com/products/opto


4-Pin Half-Pitch Mini-Flat Package (White)

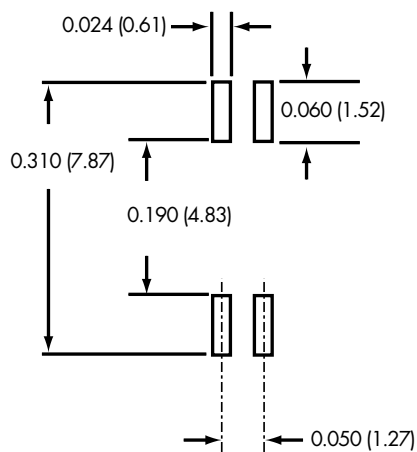

4-Pin Full-Pitch Mini-Flat Package (White)

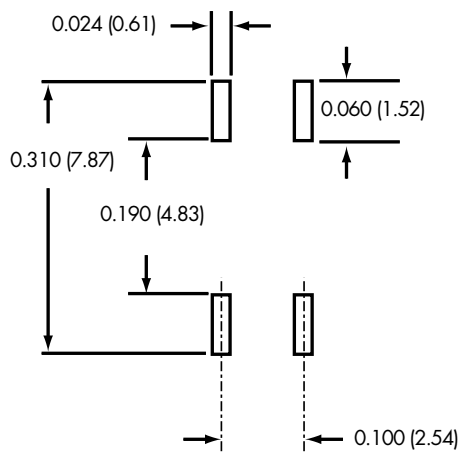


4-Pin Surface Mount Dual In-line Package (Black)

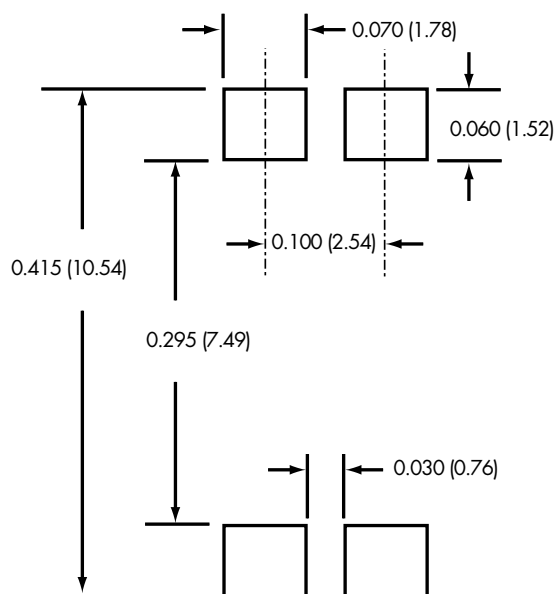


All dimensions are in inches (millimeters)

PCB Layouts


6-Pin Surface Mount Dual In-line Package (White)

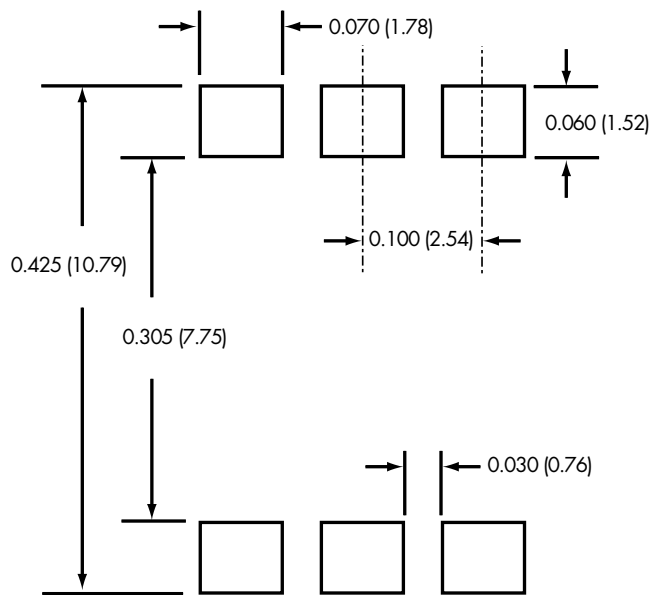


8-Pin Surface Mount Dual In-line Package (Black)

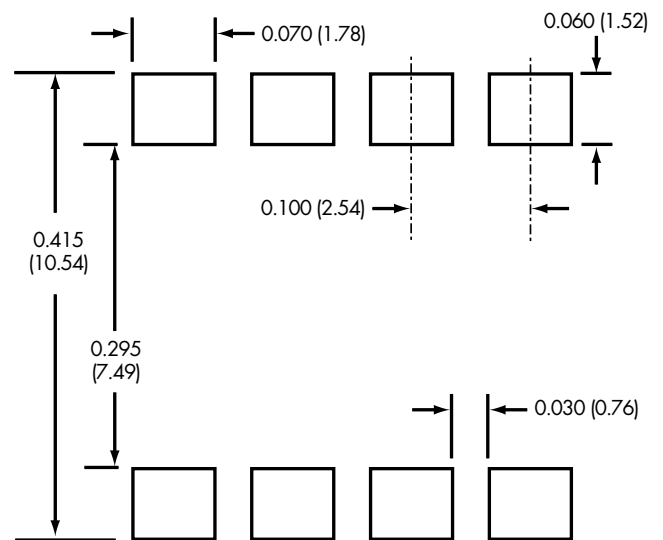

6-Pin Surface Mount Dual In-line Package (Black)

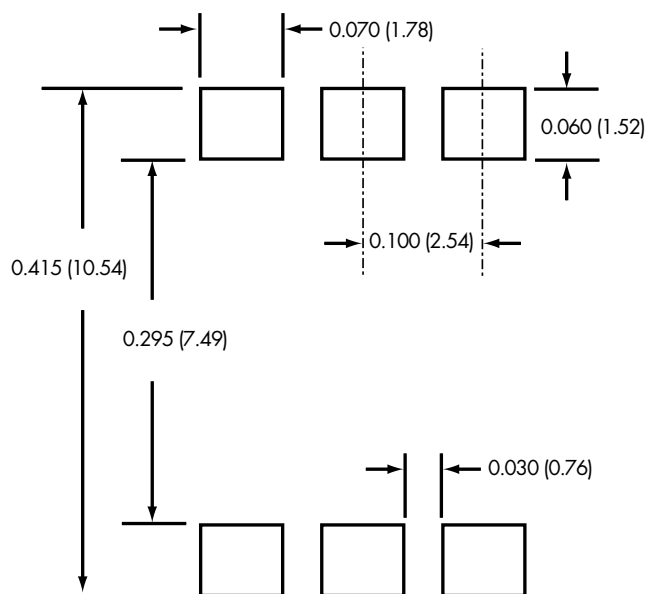


8-Pin Small Outline Package (White)

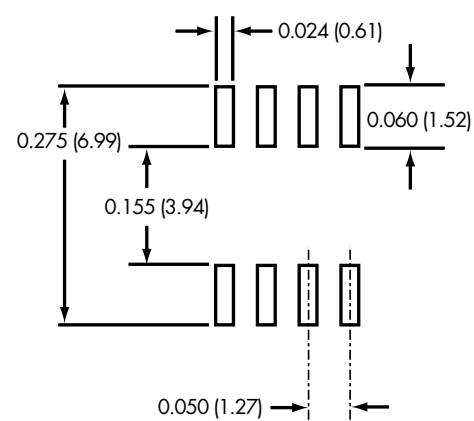


All dimensions are in inches (millimeters)

Carrier Tape Specifications

4-Pin Half-Pitch Mini-Flat Package (White)

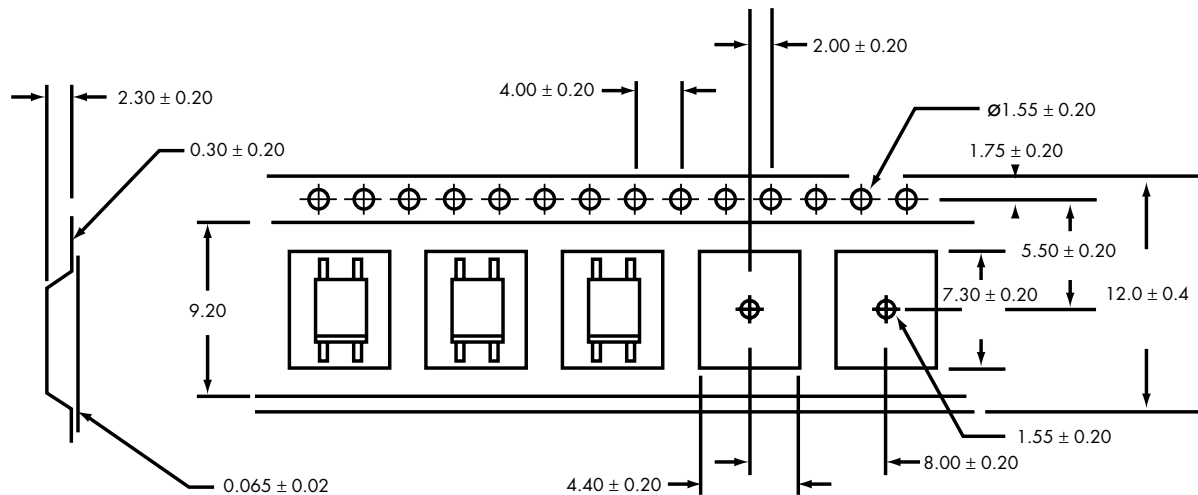


4-Pin Full-Pitch Mini-Flat Package (White)

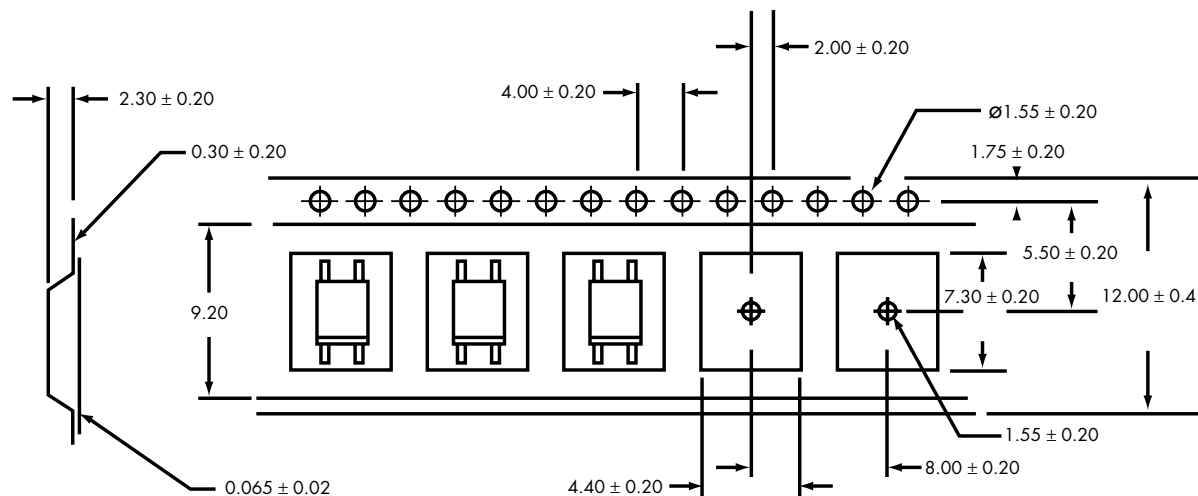

All dimensions are in millimeters

Carrier Tape Specifications


4-Pin Surface Mount Dual In-line Package (Black)

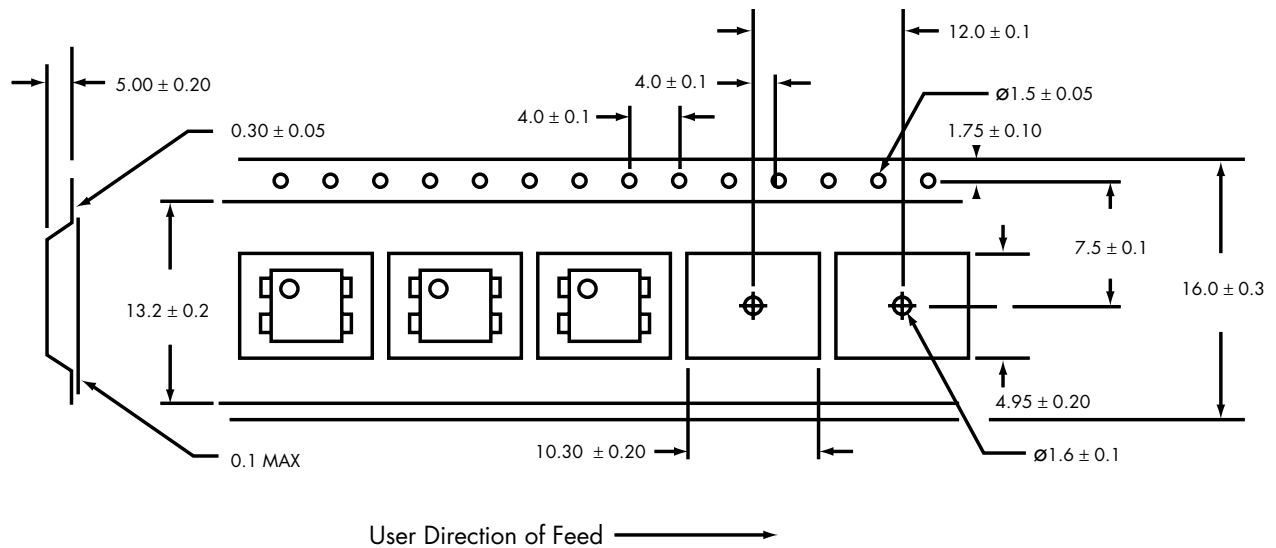


All dimensions are in millimeters

Carrier Tape Specifications

6-Pin Surface Mount Dual In-line Package (White)

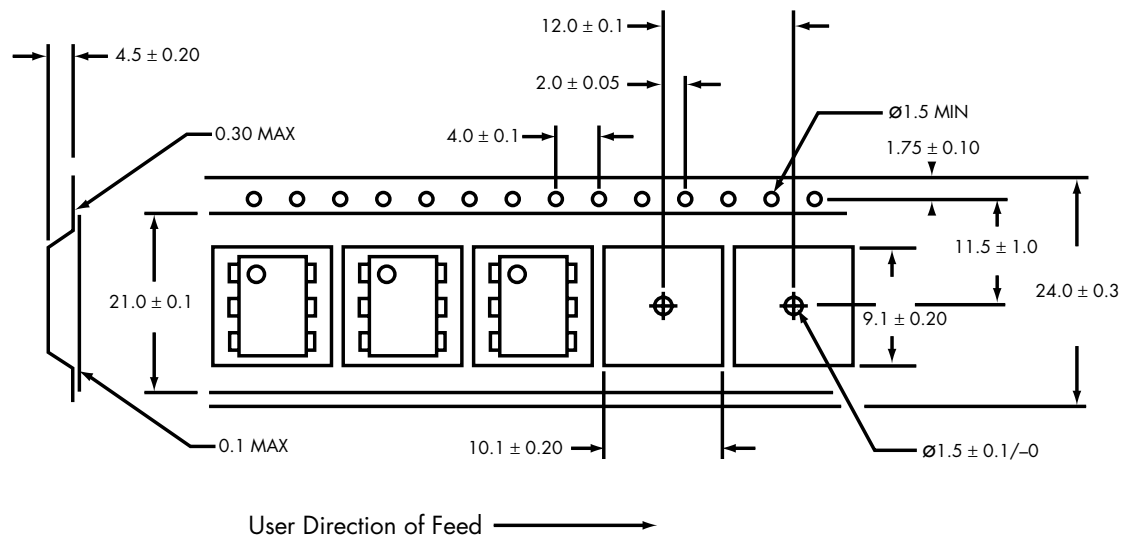


6-Pin Surface Mount Dual In-line Package (Black)

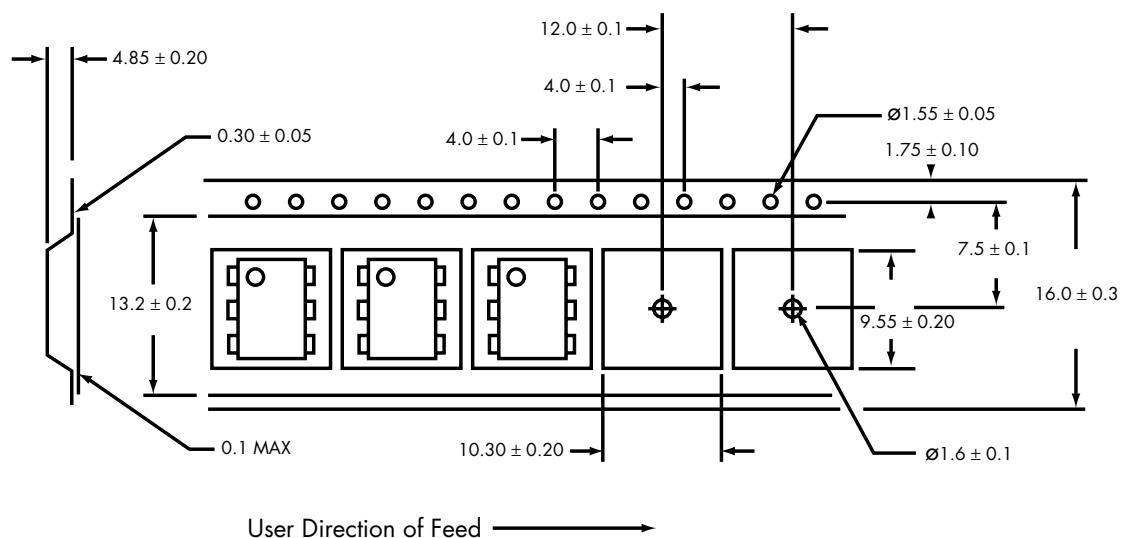


Note: All dimensions are in millimeters

Carrier Tape Specifications

8-Pin Surface Mount Dual In-line Package (Black)

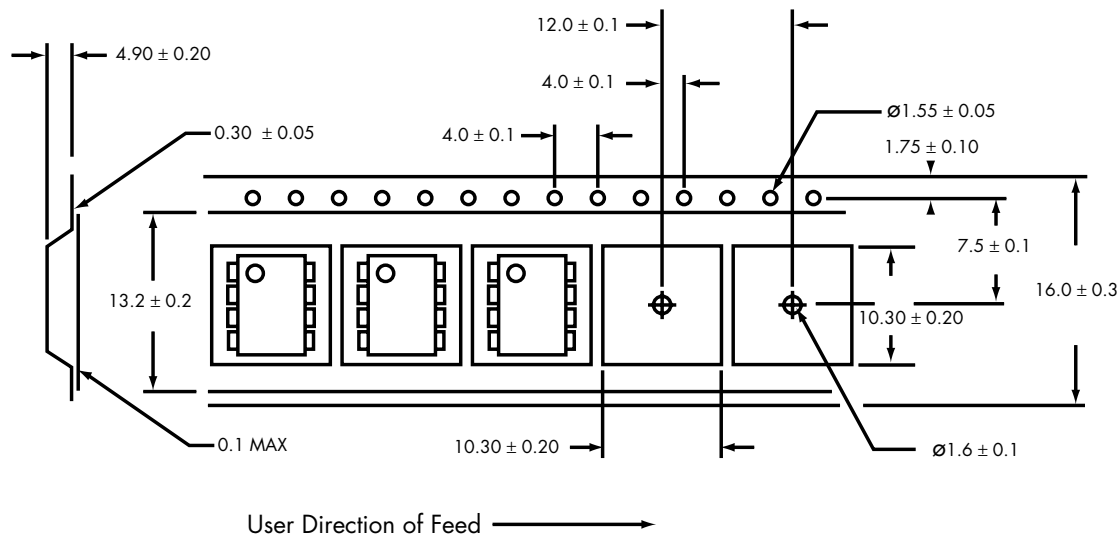

8-Pin Small Outline Package (White)

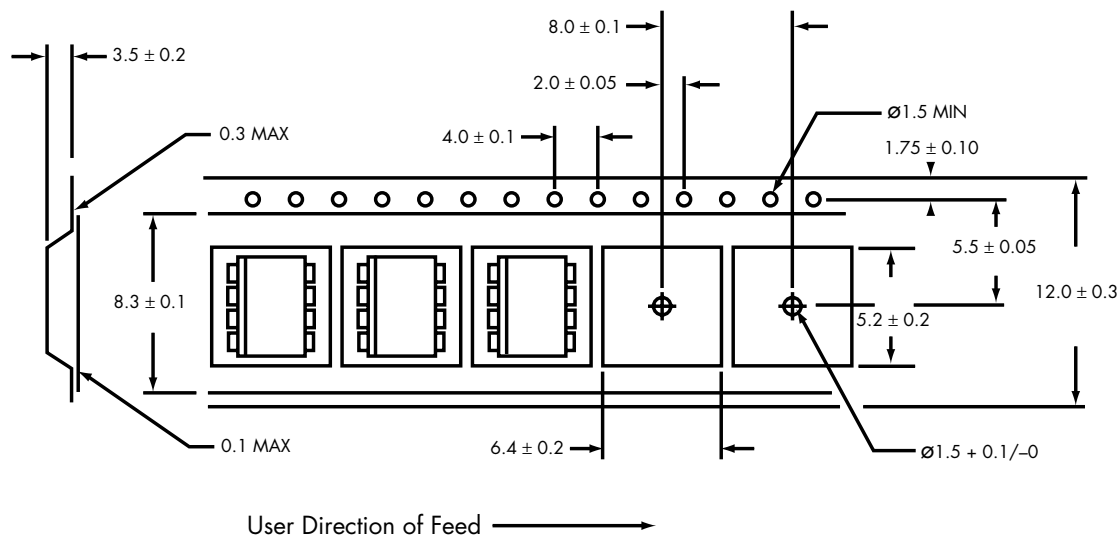

All dimensions are in millimeters

Safety Agency Certification/Reference Numbers

Agency Designation

Agency Name (Country)

BABT

British Approvals Board for Telecommunications (UK)

Package Description (Designation)

Certificate/Reference Numbers

4-Pin (White) Half Pitch Mini-Flat Package

NA

4-Pin (White) Full Pitch Mini-Flat Package

NA

4-Pin (Black) Dual In-line Package

NA

6-Pin (Black) Dual In-line Package

607992

6-Pin (White) Dual In-line Package

CR/0117

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

NA

BSI

British Standards Institute (UK)

4-Pin (White) Half Pitch Mini-Flat Package

8611, 8612

4-Pin (White) Full Pitch Mini-Flat Package

8611, 8612

4-Pin (Black) Dual In-line Package

7676, 7677

6-Pin (Black) Dual In-line Package

7676, 7677

6-Pin (White) Dual In-line Package

NA

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

8460, 8461; 8661, 8662

CSA

Canadian Standards Association (Canada)

4-Pin (White) Half Pitch Mini-Flat Package

1201524

4-Pin (White) Full Pitch Mini-Flat Package

1162301

4-Pin (Black) Dual In-line Package

1027742

6-Pin (Black) Dual In-line Package

1027742

6-Pin (White) Dual In-line Package

1113639; 1213275 (for SSRs)

8-Pin (Black) Dual In-line Package

1027742

8-Pin (White) Small Outline Package

1113643

DEMKO

Demko (Denmark)

4-Pin (White) Half Pitch Mini-Flat Package

NA

4-Pin (White) Full Pitch Mini-Flat Package

NA

4-Pin (Black) Dual In-line Package

130726-01

6-Pin (Black) Dual In-line Package

310684-02

6-Pin (White) Dual In-line Package

310983-01

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

NA

FIMKO

Fimko (Finland)

4-Pin (White) Half Pitch Mini-Flat Package

NA

4-Pin (White) Full Pitch Mini-Flat Package

NA

4-Pin (Black) Dual In-line Package

FI 12103

6-Pin (Black) Dual In-line Package

FI 16812

6-Pin (White) Dual In-line Package

FI 17434

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

NA

Safety Agency Certification/Reference Numbers

Agency Designation

Agency Name (Country)

NEMKO

Nemko (Norway)

Package Description (Designation)

Certificate/Reference Numbers

4-Pin (White) Half Pitch Mini-Flat Package

NA

4-Pin (White) Full Pitch Mini-Flat Package

NA

4-Pin (Black) Dual In-line Package

P01101879

6-Pin (Black) Dual In-line Package

P01101067

6-Pin (White) Dual In-line Package

P01101866

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

NA

SEMKO

Semko (Sweden)

4-Pin (White) Half Pitch Mini-Flat Package

NA

4-Pin (White) Full Pitch Mini-Flat Package

NA

4-Pin (Black) Dual In-line Package

0128053

6-Pin (Black) Dual In-line Package

0122085

6-Pin (White) Dual In-line Package

0134082

8-Pin (Black) Dual In-line Package

NA

8-Pin (White) Small Outline Package

NA

UL

Underwriters Laboratories (USA)

4-Pin (White) Half Pitch Mini-Flat Package

E90700, Volume 2

4-Pin (White) Full Pitch Mini-Flat Package

E90700, Volume 2

4-Pin (Black) Dual In-line Package

E90700, Volume 1

6-Pin (Black) Dual In-line Package

E90700, Volume 1

6-Pin (White) Dual In-line Package

E90700, Volume 2; E220443 (for SSRs)

8-Pin (Black) Dual In-line Package

E90700, Volume 1

8-Pin (White) Small Outline Package

E90700, Volume 2

VDE

VDE (Germany)

4-Pin (White) Half Pitch Mini-Flat Package

136480

4-Pin (White) Full Pitch Mini-Flat Package

136480

4-Pin (Black) Dual In-line Package

104801

6-Pin (Black) Dual In-line Package

94766

6-Pin (White) Dual In-line Package

102497

8-Pin (Black) Dual In-line Package

102915

8-Pin (White) Small Outline Package

136616

Glossary of Terms

Terms	Definitions	Symbol	Unit
Breakdown Voltage	Voltage at which junction may break down and device cease to operate as specified	V_{BR}	V
	Minimum collector to base breakdown voltage with the emitter open	$BV_{CBO (MIN)}$	V
	Minimum collector to emitter breakdown voltage with the base open	$BV_{CEO (MIN)}$	V
	Minimum emitter to collector breakdown voltage with the base open	$BV_{ECO (MIN)}$	V
Critical Voltage Rise Rate	Critical rate of rise of off-state voltage	dv/dt	V/ μ s
Current	Off-state current	I_{DM}	μ A
	Off-state/dark current	I_{46}	nA
	Peak blocking current, either direction.	I_{DRM}	μ A
	Holding current	I_H	mA
	Current limit	I_{LMT}	mA
	On-state RMS input current	$I_{ON RMS}$	mA
	Off-state RMS input current	$I_{OFF RMS}$	mA
Current Transfer Ratio	Ratio of the collector current to the diode forward current (I_C/I_F).	CTR	%
Forward Voltage	Maximum input forward voltage	$V_{F MAX}$	V
Input Current	The current flowing through a diode from anode to cathode	I_F	mA
	LED trigger current	I_{FT}	mA
	Turn-on threshold current	$I_{FT (ON)}$	mA
	Turn-off threshold current	$I_{FT (OFF)}$	mA
	Maximum input threshold current	I_{TH+}	mA
	Minimum input threshold current	I_{TH-}	mA
Input Voltage	High level input voltage	V_{IH}	V
	Low level input voltage	V_{IL}	V
Isolation Voltage	AC_{RMS} isolation voltage rating for one (1) minute duration	V_{ISO}	V
Operating Temperature Range	Temperature range for which operating specifications are valid	T_{OPR}	$^{\circ}$ C
Output Current	Logic high output current	I_{OH}	mA or μ A
	Logic low output current	I_{OL}	mA or μ A
Propagation Time	Propagation delay time to logic high output	t_{PHL}	μ s
	Propagation delay time to logic low output	t_{PLH}	μ s
Resistance	On-state output resistance	$R_{DS (ON)}$	Ω
	Off-state output resistance	$R_{DS (OFF)}$	Ω
Rise/Fall Time	Time delay between the 10% and 90% point on the rising and falling edges	t_R/t_F	μ s
Soldering Temperature	Temperature for lead soldering	T_{SOL}	$^{\circ}$ C
Storage Temperature Range	Temperature range for storage while not in operation	T_{STR}	$^{\circ}$ C
Supply Current	Operating supply current	$I_{CC (ON)}$	mA
	Logic high supply current	I_{CCH}	mA
	Logic low supply current	I_{CCL}	mA
Supply Voltage	Operating supply voltage	V_{CC}	V
Switching Time	Turn-on/turn-off switching time	t_{ON}/t_{OFF}	μ s
Voltage	Voltage between anode and cathode of SCR	V_{AK}	V
	Collector to emitter saturation voltage	$V_{CE (SAT)}$	V
	Off-state output terminal voltage	V_{DRM}	V
	Reference voltage	V_{REF}	V
	On-state RMS input voltage	$V_{I (ON) RMS}$	V
	Logic low output voltage	V_{OL}	V
	Maximum input threshold voltage	V_{TH+}	V
	Minimum input threshold voltage	V_{TH-}	V
	Operating voltage range	V_{OPR}	V
	On-state voltage	V_{TM}	V

www.fairchildsemi.com/products/opto

Americas

Fairchild Semiconductor
Customer Response Center
7701 Las Colinas Ridge, Suite 400
Irving, Texas 75063
United States
Tel: 888-522-5372
Fax: 972-910-8036

China

Fairchild Semiconductor
Hong Kong Ltd.
Shenzhen Representative Office
Room 3107-8, Shun Hing Square
Di Wang Commercial Centre
5002 Shen Nan Road East
Shenzhen PRC 518008
Tel: 86-755-246-3008
Fax: 86-755-246-2092

Fairchild Semiconductor
(Shanghai) Company Limited
Puxi Liaison Office
Room 2208, Kerry Centre
No. 1515 Nanjing West Road
Jingan, Shanghai 200040
P.R. China
Tel: 86-21-5298-6262
Fax: 86-21-5298-5118/9

Finland

Fairchild Semiconductor
Itakatu 3D213
FIN-00930 Helsinki
Tel: 358-9-3411266
Fax: 358-9-3411292

France

Fairchild Semiconductor SAS
Immeuble Dublin
2, place Gustave Eiffel
Silic 227
F-94528 Rungis Cedex
Tel: 33 (0) 1 56 34 72 10
Fax: 33 (0) 1 56 34 72 11

Germany

Fairchild Semiconductor
Oskar-von-Miller-Strasse 4e
D-82256 Fuerstenfeldbruck
Tel: 49-8141-6102 0
Fax: 49-8141-6102 100

Hong Kong

Fairchild Semiconductor
Hong Kong Ltd.
19/F, CMG Asia Tower
The Gateway II, 15 Canton Road
Tsimshatsui, Kowloon
Hong Kong
Tel: 852-2722-8338
Fax: 852-2722-8383

Italy

Fairchild Semiconductor Srl
Via Carducci 125
Sesto San Giovanni, Milan I-20099
Tel: 39-02-2491111
Fax: 39-02-26263424

Japan

Fairchild Semiconductor Japan, Ltd.
6F, Bancho-Kaikan
12-1 Gobancho, Chiyoda-ku
Tokyo, 102-0076
Tel: 813-5275-8380
Fax: 813-5275-8390

Fairchild Semiconductor, Ltd.
Osaka Office
8F Shin-Osaka-Meiko Building
4-3-12, Miyahara Yodogawa-ku
Osaka-shi, 532-0003
Tel: 81-6-398-3670
Fax: 81-6-398-3680

Korea

Fairchild Korea Semiconductor, Ltd.
Buchon Office
82-3, Dodang-Dong
Wonmi-ku, Buchon
Kyounggi-Do
Tel: 82-32-680-1000
Fax: 82-32-680-1949

Fairchild Korea Semiconductor, Ltd.
Suwon Office
6th Floor Song-i-Building
976-12, Youngtong-dong
Paldal-ku, Suwon
Gyeonggi-do 442-470
Tel: 82-31-205-0291
Fax: 82-31-205-3352

Korea (Continued)

Fairchild Korea Semiconductor, Ltd.
Kumi Office
4FL, Seronet Building
274-9, Song Jung-Dong
Kumi, Kyungbuk 730-090
Tel: 82-54-457-4111
Fax: 82-54-457-4121

Mexico

Fairchild Semiconductor
Av. Vallarta #6503 Flr. 14
Col. Cd Granjas
Zapopan Jalisco 45010
Tel: 52-3-1100017
Fax: 52-3-1101878

Singapore

Fairchild Semiconductor
Asia Pacific Pte. Ltd.
350 Orchard Road
#20-01/03 Shaw House
238868 Vejile
Tel: 65-6836-0936
Fax: 65-6838-0321

Sweden

Fairchild Semiconductor
Industrivagen 7
SE-171 48 Solna
Tel: 46-8-6515530
Fax: 46-8-6515505

Taiwan

Fairchild Semiconductor
Hong Kong, Ltd.
Taiwan Branch
9/F, No. 167
Tun Hwa North Road
Taipei
Tel: 886-2-2712-0500
Fax: 886-2-2546-7188

UK

Fairchild Semiconductor Ltd.
10 Interface Business Park
Binknoll Lane
Wootton Bassett
Swindon, Wiltshire
SN4 8SY
Tel: 44-1793-856856
Fax: 44-1793-856857



OPTOLOGIC® is a registered trademark of Fairchild Semiconductor.

Lit. No. 250001-001

© 2002 Fairchild Semiconductor Corporation, All Rights Reserved

